

High Voltage / Current Power Cords



As the power consumption increases over 125 volts and/or 10 amps, the plug configuration can change. The different NEMA configurations and IEC configurations provide a safety feature which keys power outlets so that a power cord will not be plugged into the wrong outlet.

125 Volts

15 AMP

● NEMA 5-15P to IEC-60320-C19

APPROVALS: UL, CSA






NEMA 5-15P

IEC-60320-C19

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5050.018	1' 6"	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
5050.098	8' 2"	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
5050.120	10'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
5050.066	5' 6"	14/3 SJTW	Black	N. American	N. American	.360 - .395	15A/125V

● NEMA 5-15P to IEC-60320-C19R (Right Angle)

APPROVALS: UL, CSA

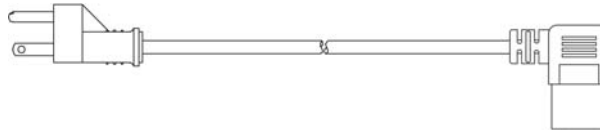



NEMA 5-15P

IEC-60320-C19 Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5054.036	3'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
5054.098	8' 2"	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V

● NEMA 5-20P to IEC-60320-C13

APPROVALS: UL, CSA






NEMA 5-20P

IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1702.072	6'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
1702.096	8'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
1702.120	10'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V

● IEC-60320-C20 to NEMA 5-15R

APPROVALS: UL, CSA



IEC-60320-C20

NEMA 5-15R



Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5283.012	1'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V

* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

Locking

● NEMA L5-15P (Locking) to IEC-60320-C13

APPROVALS: UL, CSA



NEMA L5-15P



IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
4810.072	6'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
4810.180	15'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
4818.048	4'	14/3 SJT Shielded	Black	N. American	N. American	.360 - .395	15A/125V
4818.072	6'	14/3 SJT Shielded	Black	N. American	N. American	.360 - .395	15A/125V

Locking

● NEMA L5-15P (Locking) to IEC-60320-C13R (Right Angle)

APPROVALS: UL, CSA



NEMA L5-15P




IEC-60320-C13
Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
4811.168	14'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V

Locking

● NEMA L5-15P (Locking) to IEC-60320-C19

APPROVALS: UL, CSA



NEMA L5-15P




IEC-60320-C19

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
4812.098	8' 2"	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V

Locking

● NEMA L5-15P (Locking) to NEMA 5-15R

APPROVALS: UL, CSA



NEMA L5-15P




NEMA 5-15R

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5230.012	1'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
5230.072	6'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V

Locking

● NEMA L5-15P (Locking) to NEMA L5-15R (Locking)

APPROVALS: UL, CSA



NEMA L5-15P

NEMA L5-15R


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1815.036	3'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
1815.072	6'	14/3 SJT	Black	N. American	N. American	.360 - .395	15A/125V
1800.084	7'	14/3 SJT Shielded	Black	N. American	N. American	.360 - .395	15A/125V

* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

18 AMP

● NEMA 5-20P to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA

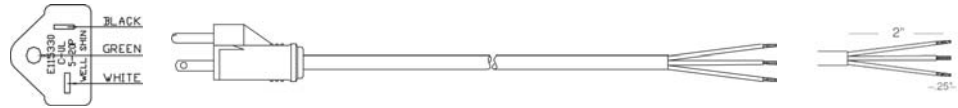

NEMA 5-20P


Standard ROJ

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1700.072	6'	14/3 SJT	Black	N. American	.360 - .395	18A/125V	
1700.096	8'	14/3 SJT	Black	N. American	.360 - .395	18A/125V	
1700.120	10'	14/3 SJT	Black	N. American	.360 - .395	18A/125V	

20 AMP

● NEMA 5-20P to IEC-60320-C19

APPROVALS: UL, CSA

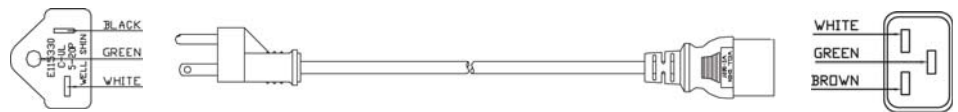


NEMA 5-20P

IEC-60320-C19

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 5052.024	2'	12/3 SJT	Black	N. American	.425 - .475	20A/125V	
* 5052.098	8' 2"	12/3 SJT	Black	N. American	.425 - .475	20A/125V	
5052.168	14'	12/3 SJT	Black	N. American	.425 - .475	20A/125V	
5052.180	15'	12/3 SJT	Black	N. American	.425 - .475	20A/125V	
5052.196	16'	12/3 SJT	Black	N. American	.425 - .475	20A/125V	

● NEMA 5-20P to IEC-60320-C19R (Right Angle)

APPROVALS: UL, CSA

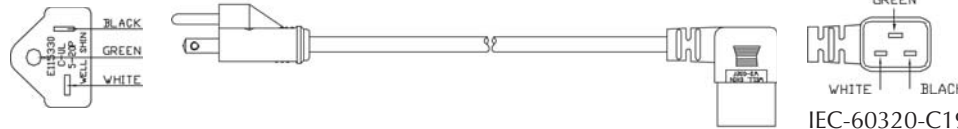

NEMA 5-20P

IEC-60320-C19 Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5055.036	3'	12/3 SJT	Black	N. American	.425 - .475	20A/125V	
5055.048	4'	12/3 SJT	Black	N. American	.425 - .475	20A/125V	
5055.072	6'	12/3 SJT	Black	N. American	.425 - .475	20A/125V	
5071.072	6'	12/3 SJT Shielded	Black	N. American	.425 - .475	20A/125V	

● NEMA 5-20P to NEMA 5-20R

APPROVALS: UL, CSA



NEMA 5-20P

NEMA 5-20R

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
4803.120	10'	12/3 SJT	Black	N. American	.425 - .475	20A/125V	




High Voltage / Current

High Voltage

● **NEMA 5-20P to Standard ROJ (Remove Outer Jacket)**

APPROVALS: UL, CSA

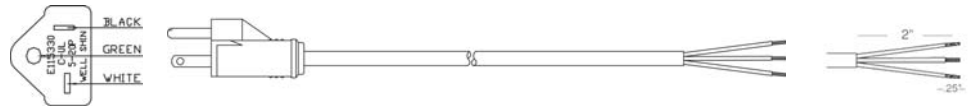

NEMA 5-20P


Standard ROJ

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1701.072	6'	12/3 SJT	Black	N. American		.425 - .475	20A/125V
*1701.096	8'	12/3 SJT	Black	N. American		.425 - .475	20A/125V
1701.120	10'	12/3 SJT	Black	N. American		.425 - .475	20A/125V

Locking

● **NEMA L5-20P (Locking) to IEC-60320-C19**

APPROVALS: UL, CSA

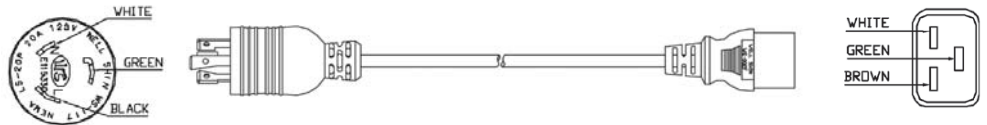

NEMA L5-20P


IEC-60320-C19

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
*5082.098	8' 2"	12/3 SJT	Black	N. American		.425 - .475	20A/125V
5082.120	10'	12/3 SJT	Black	N. American		.425 - .475	20A/125V
5082.144	12'	12/3 SJT	Black	N. American		.425 - .475	20A/125V
5082.180	15'	12/3 SJT	Black	N. American		.425 - .475	20A/125V

Locking

● **NEMA L5-20P (Locking) to NEMA L5-20R (Locking)**

APPROVALS: UL, CSA

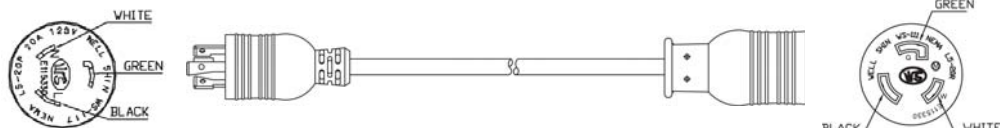

NEMA L5-20P


NEMA L5-20R

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
4801.072	6'	12/3 SJT	Black	N. American		.425 - .475	20A/125V
4801.096	8'	12/3 SJT	Black	N. American		.425 - .475	20A/125V
4801.120	10'	12/3 SJT	Black	N. American		.425 - .475	20A/125V
*4801.180	15'	12/3 SJT	Black	N. American		.425 - .475	20A/125V

Locking

● **NEMA L5-20P (Locking) to Standard ROJ (Remove Outer Jckt)**

APPROVALS: UL, CSA

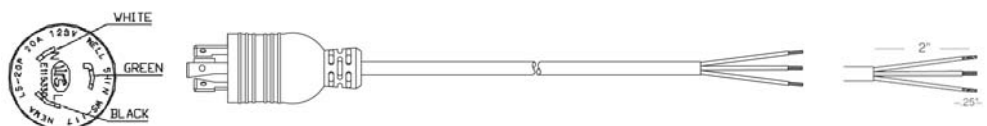

NEMA L5-20P

Standard ROJ


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
4815.072	6'	12/3 SJT	Black	N. American		.425 - .475	20A/125V



Locking

● NEMA L5-30P (Locking) to IEC-60320-C19

APPROVALS: UL, CSA

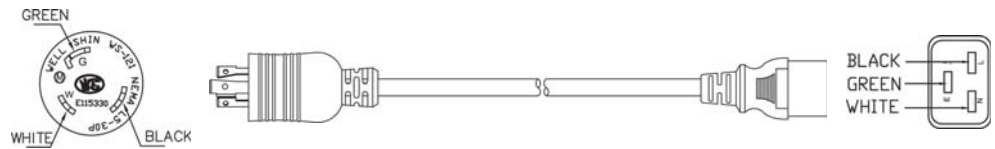

NEMA L5-30P

IEC-60320-C19


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5089.098	8' 2"	12/3 SJT	Black	N. American	N. American	.425 - .475	20A/125V
5089.120	10'	12/3 SJT	Black	N. American	N. American	.425 - .475	20A/125V
5089.180	15'	12/3 SJT	Black	N. American	N. American	.425 - .475	20A/125V

30 AMP

Locking

● NEMA L5-30P (Locking) to NEMA L5-30R (Locking)

APPROVALS: UL, CSA

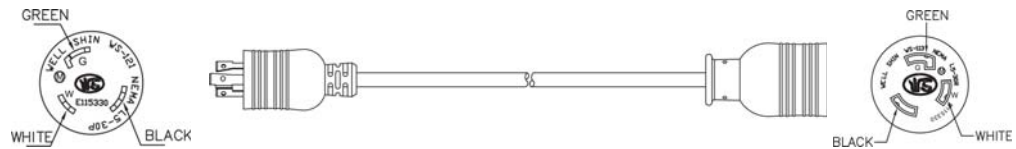

NEMA L5-30P


NEMA L5-30R

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
3006.096	8' 2"	10/3 SJT	Black	N. American	N. American	.550 - .590	30A/125V
3006.120	10'	10/3 SJT	Black	N. American	N. American	.550 - .590	30A/125V

Locking

● NEMA L5-30P (Locking) to Standard ROJ (Remove Outer Jckt)

APPROVALS: UL, CSA

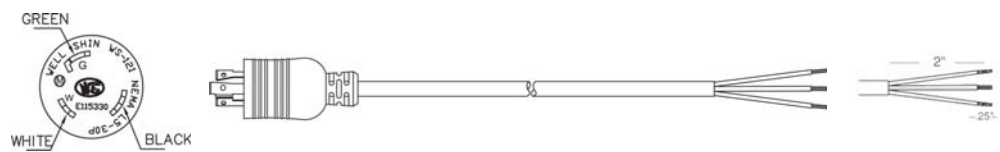

NEMA L5-30P

Standard ROJ


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
3005.096	8'	10/3 SJT	Black	N. American	N. American	.550 - .590	30A/125V
3018.096	8'	10/3 SJO	Black	N. American	N. American	.550 - .590	30A/125V

250 Volts

10 AMP

● NEMA 6-15P to IEC-60320-C5

APPROVALS: UL, CSA

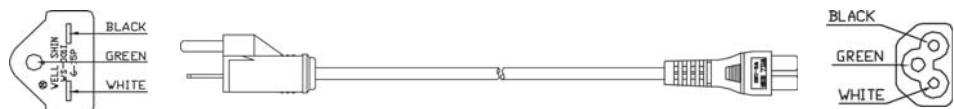

NEMA 6-15P


IEC-60320-C5

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1096.072	6'	18/3 SVT	Black	N. American	N. American	.230 - .265	2.5A/250V
1096.096	8'	18/3 SVT	Black	N. American	N. American	.230 - .265	2.5A/250V

* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

● NEMA 6-15P to IEC-60320-C13

APPROVALS: UL, CSA






NEMA 6-15P

IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1696.036	3'	18/3 SJT	Black	International	.300 - .335	10A/250V	
1696.096	8'	18/3 SJT	Black	International	.300 - .335	10A/250V	
1696.120	10'	18/3 SJT	Black	International	.300 - .335	10A/250V	
1695.048	2'	18/3 SVT	Black	International	.230 - .265	10A/250V	
1695.079	6' 7"	18/3 SVT	Black	International	.230 - .265	10A/250V	

● NEMA 6-15P to IEC-60320-C13R (Right Angle)

APPROVALS: UL, CSA






NEMA 6-15P

IEC-60320-C13 Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1678.096	8'	18/3 SJT	Black	International	.300 - .335	10A/250V	

● NEMA 6-15P to IEC-60320-C15R (Right Angle)

APPROVALS: UL, CSA



NEMA 6-15P


IEC-60320-C15 Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5087.072	6'	18/3 SJT	Black	N. American	.300 - .335	10A/250V	

13 AMP

● NEMA 6-15P to IEC-60320-C13

APPROVALS: UL, CSA




NEMA 6-15P

IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1697.036	3'	16/3 SJT	Black	International	.335 - .360	13A/250V	
1697.072	6'	16/3 SJT	Black	International	.335 - .360	13A/250V	
1697.120	10'	16/3 SJT	Black	International	.335 - .360	13A/250V	

● NEMA 6-15P to IEC-60320-C15

APPROVALS: UL, CSA



NEMA 6-15P




IEC-60320-C15

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5076.096	8'	16/3 SJT	Black	N. American	.335 - .360	13A/250V	
5076.120	10'	16/3 SJT	Black	N. American	.335 - .360	13A/250V	

* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

● **NEMA 6-15P to IEC-60320-C19**

APPROVALS: UL, CSA



NEMA 6-15P



IEC-60320-C19

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5072.096	8'	16/3 SJT	Black	N. American	.335 - .360	13A/250V	
5072.120	10'	16/3 SJT	Black	N. American	.335 - .360	13A/250V	
5072.144	12'	16/3 SJT	Black	N. American	.335 - .360	13A/250V	

15 AMP

● **NEMA 6-15P to IEC-60320-C13**

APPROVALS: UL, CSA





NEMA 6-15P

IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1691.036	3'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
1691.060	5'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
* 1691.072	6'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
1691.096	8'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
1691.120	10'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
1691.144	12'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
1691.180	15'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
1691.360	30'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	

● **NEMA 6-15P to IEC-60320-C19**

APPROVALS: UL, CSA





NEMA 6-15P

IEC-60320-C19

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5051.026	2' 2"	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
5051.072	6'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
* 5051.098	8' 2"	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
5051.240	20'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	

● **NEMA 6-15P to NEMA 6-15R**

APPROVALS: UL, CSA



NEMA 6-15P

NEMA 6-15R

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1805.120	10'	14/3 SJT	Black	N. American	.360 - .395	15A/250V	
2084.85	9'	14/3 ST	Black	N. American	.500 - .575	15A/250V	



● **NEMA 6-15P to Standard ROJ (Remove Outer Jacket)**

APPROVALS: UL, CSA




NEMA 6-15P

Standard ROJ

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
1690.072	6'	14/3 SJT	Black	N. American	.360 - .395	15A/250V
1690.096	8'	14/3 SJT	Black	N. American	.360 - .395	15A/250V
1690.120	10'	14/3 SJT	Black	N. American	.360 - .395	15A/250V

● **NEMA 6-20P to IEC-60320-C13**

APPROVALS: UL, CSA




NEMA 6-20P

IEC-60320-C13

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
1694.072	6'	14/3 SJT	Black	N. American	.360 - .395	15A/250V
1694.096	8'	14/3 SJT	Black	N. American	.360 - .395	15A/250V
1694.120	10'	14/3 SJT	Black	N. American	.360 - .395	15A/250V

● **IEC-60320-C14 to IEC-60320-C19**

APPROVALS: UL, CSA



IEC-60320-C14

IEC-60320-C19

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
5287.008	8"	14/3 SJT	Black	International	.360 - .395	15A/250V
5287.036	3'	14/3 SJT	Black	International	.360 - .395	15A/250V
5287.072	6'	14/3 SJT	Black	International	.360 - .395	15A/250V
5287.096	8'	14/3 SJT	Black	International	.360 - .395	15A/250V
5287.098	8'2"	14/3 SJT	Black	International	.360 - .395	15A/250V
5287.120	10'	14/3 SJT	Black	International	.360 - .395	15A/250V
5287.144	12'	14/3 SJT	Black	International	.360 - .395	15A/250V

● **IEC-60320-C19 to Standard ROJ (Remove Outer Jacket)**

APPROVALS: UL, CSA



IEC-60320-C19

Standard ROJ

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
0101.098	8' 2"	14/3 SJT	Black	N. American	.360 - .395	15A/250V
0101.168	14'	14/3 SJT	Black	N. American	.360 - .395	15A/250V

● **IEC-60320-C19 to Standard ROJ (Remove Outer Jacket)**

APPROVALS: UL, CSA



IEC-60320-C19


Standard ROJ

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
0144.072	6'	14/3 SJT Shielded	Black	International	.360 - .395	15A/250V
0144.098	8' 2"	14/3 SJT Shielded	Black	International	.360 - .395	15A/250V

Locking

● NEMA L6-15P (Locking) to IEC-60320-C13

APPROVALS: UL, CSA



NEMA L6-15P


IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1809.072	6'	14/3 SJT	Black		N. American	.360 - .395	15A/250V
1809.096	8'	14/3 SJT	Black		N. American	.360 - .395	15A/250V

Locking

● NEMA L6-15P (Locking) to IEC-60320-C13R (Right Angle)

APPROVALS: UL, CSA



NEMA L6-15P


IEC-60320-C13 Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1812.096	8'	14/3 SJT	Black		N. American	.360 - .395	15A/250V

Locking

● NEMA L6-15P (Locking) to IEC-60320-C19

APPROVALS: UL, CSA

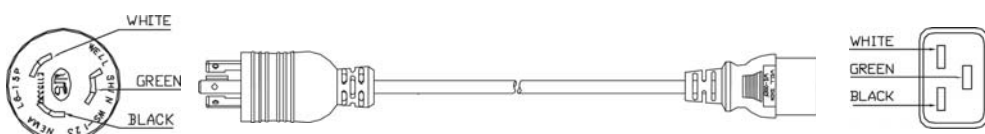

NEMA L6-15P


IEC-60320-C19

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5083.072	6'	14/3 SJT	Black		N. American	.360 - .395	15A/250V
5083.098	8' 2"	14/3 SJT	Black		N. American	.360 - .395	15A/250V

Locking

● NEMA L6-15P (Locking) to NEMA L6-15R (Locking)

APPROVALS: UL, CSA

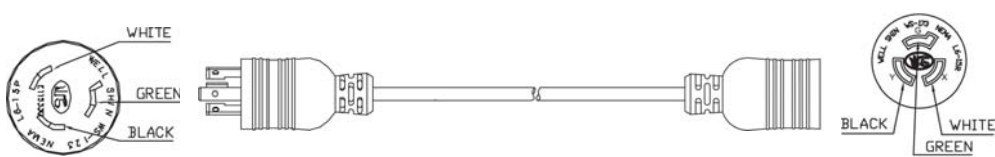

NEMA L6-15P


NEMA L6-15R

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1806.168	14'	14/3 SJT	Black		N. American	.360 - .395	15A/250V

Locking

● NEMA L6-20P (Locking) to IEC-60320-C13

APPROVALS: UL, CSA

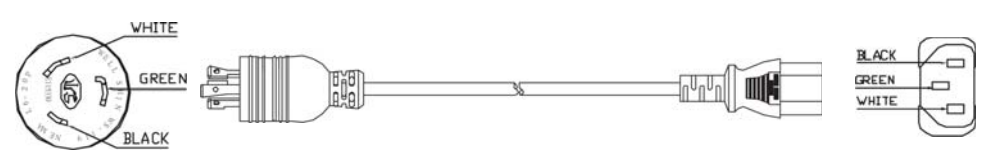

NEMA L6-20P

IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
4802.072	6'	14/3 SJT	Black		N. American	.360 - .395	15A/250V
4802.120	10'	14/3 SJT	Black		N. American	.360 - .395	15A/250V
4802.180	15'	14/3 SJT	Black		N. American	.360 - .395	15A/250V


* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

16 AMP

Universal

● IEC-60320-C20 to IEC-60320-C19

APPROVALS: UL, CSA, VDE

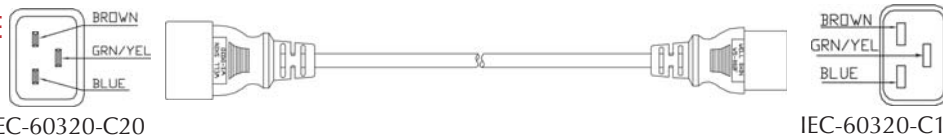

IEC-60320-C20

IEC-60320-C19

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
5282.118	9' 10"	H05VV-F3G1.5mm ² /16/3 SJT	Black	International	8.5 mm	16A/250V

18 AMP

● NEMA 6-20P to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA



NEMA 6-20P


Standard ROJ

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
1692.072	6'	14/3 SJT	Black	N. American	.360 - .395	18A/250V
1692.096	8'	14/3 SJT	Black	N. American	.360 - .395	18A/250V
1692.120	10'	14/3 SJT	Black	N. American	.360 - .395	18A/250V

20 AMP

● NEMA 6-20P to IEC-60320-C19

APPROVALS: UL, CSA

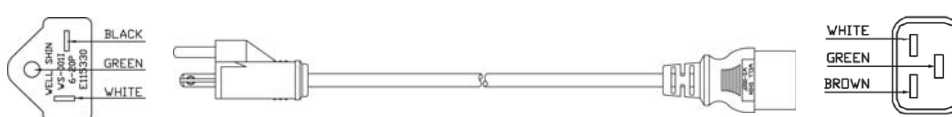


NEMA 6-20P

IEC-60320-C19

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
5053.026	2' 2"	12/3 SJT	Black	N. American	.425 - .475	20A/250V
5053.072	6'	12/3 SJT	Black	N. American	.425 - .475	20A/250V
5053.098	8' 2"	12/3 SJT	Black	N. American	.425 - .475	20A/250V
5053.147	12' 3"	12/3 SJT	Black	N. American	.425 - .475	20A/250V
5053.168	14'	12/3 SJT	Black	N. American	.425 - .475	20A/250V

● NEMA 6-20P to IEC-60320-C19R (Right Angle)

APPROVALS: UL, CSA

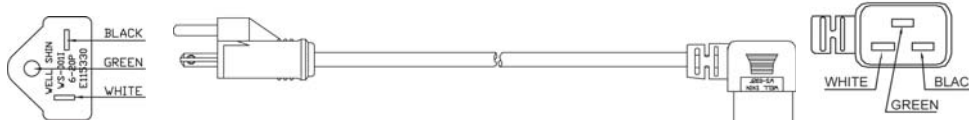


NEMA 6-20P

IEC-60320-C19
Right Angle

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
5059.090	7' 6"	12/3 SJT	Black	N. American	.425 - .475	20A/250V

● NEMA 6-20P to NEMA 6-20R

APPROVALS: UL, CSA



NEMA 6-20P

NEMA 6-20R

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
4809.120	10'	12/3 SJT	Black	N. American	.425 - .475	20A/250V

● NEMA 6-20P to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA




NEMA 6-20P

Standard ROJ

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1693.028	2' 4"	12/3 SJT	Black	N. American		.425 - .475	20A/250V
1693.072	6'	12/3 SJT	Black	N. American		.425 - .475	20A/250V
1693.096	8'	12/3 SJT	Black	N. American		.425 - .475	20A/250V
1693.120	10'	12/3 SJT	Black	N. American		.425 - .475	20A/250V

● IEC-60320-C20 to IEC-60320-C19

APPROVALS: UL, CSA




IEC-60320-C20

IEC-60320-C19

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
*5281.098	8' 2"	12/3 SJT	Black	N. American		.425 - .475	20A/250V

● IEC-60320-C20 to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA

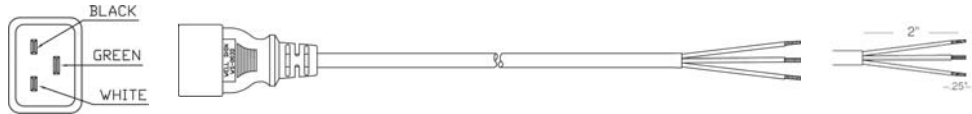


IEC-60320-C20

Standard ROJ

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5285.098	8' 2"	12/3 SJT	Black	N. American		.425 - .475	20A/250V

● IEC-60320-C19 to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA



IEC-60320-C19


Standard ROJ

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
0102.098	8' 2"	12/3 SJT	Black	N. American		.425 - .475	20A/250V
*0102.168	14'	12/3 SJT	Black	N. American		.425 - .475	20A/250V
0102.315	26' 3"	12/3 SJT	Black	N. American		.425 - .475	20A/250V

Locking

● NEMA L6-20P (Locking) to IEC-60320-C19

APPROVALS: UL, CSA

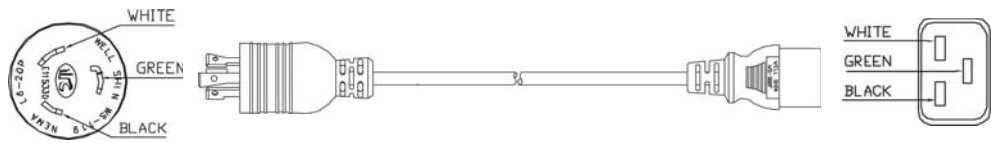

NEMA L6-20P

IEC-60320-C19


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5084.098	8' 2"	12/3 SJT	Black	N. American		.425 - .475	20A/250V
5084.120	10'	12/3 SJT	Black	N. American		.425 - .475	20A/250V
5084.144	12'	12/3 SJT	Black	N. American		.425 - .475	20A/250V
5084.180	15'	12/3 SJT	Black	N. American		.425 - .475	20A/250V

* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

Locking

● **NEMA L6-20P (Locking) to NEMA L6-20R (Locking)**

APPROVALS: UL, CSA

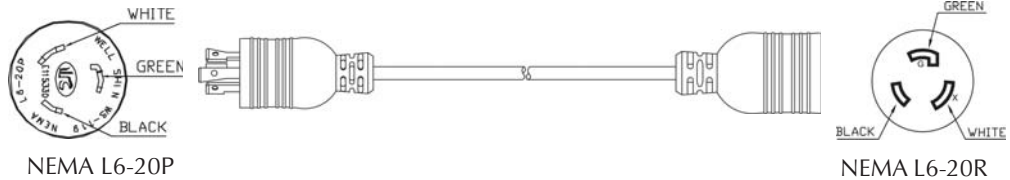


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
2071.120	10'	12/3 SJT	Black	N. American	.425 - .475	20A/250V	
2071.098	8' 2"	12/3 STO 105° C	Black	N. American	.425 - .475	20A/250V	

Locking

● **NEMA L6-30P (Locking) to IEC-60320-C19**

APPROVALS: UL, CSA

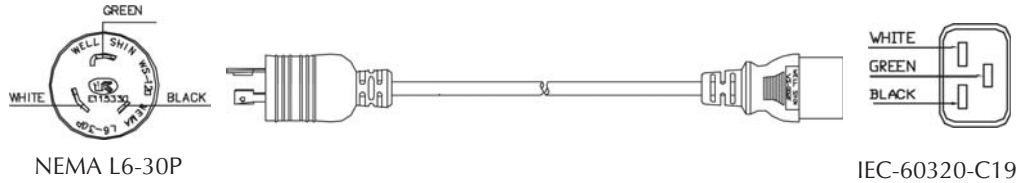


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5081.098	8' 2"	12/3 SJT	Black	N. American	.425 - .475	20A/250V	
5081.144	12'	12/3 SJT	Black	N. American	.425 - .475	20A/250V	
5081.180	15'	12/3 SJT	Black	N. American	.425 - .475	20A/250V	

30 AMP

Locking

● **NEMA L6-30P (Locking) to NEMA L6-30R (Locking)**

APPROVALS: UL, CSA

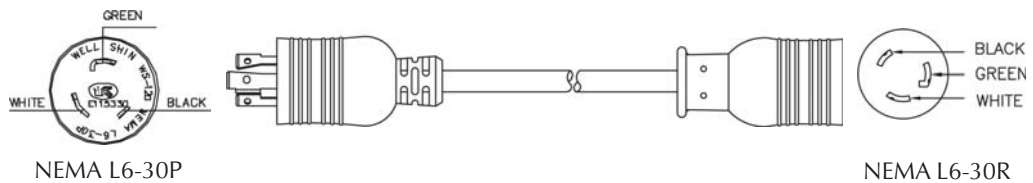


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
3330.036	3'	10/3 SJT	Black	N. American	.550 - .590	30A/250V	
3330.098	8' 2"	10/3 SJT	Black	N. American	.550 - .590	30A/250V	
3330.120	10'	10/3 SJT	Black	N. American	.550 - .590	30A/250V	

Locking

● **NEMA L6-30P (Locking) to Standard ROJ (Remove Outer Jckt)**

APPROVALS: UL, CSA

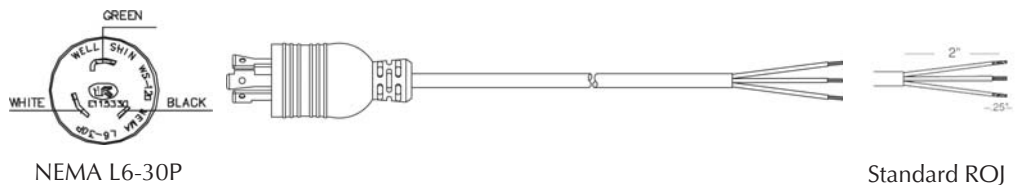

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 3013.096	8' 2"	10/3 SJT	Black	N. American	.550 - .590	30A/250V	
3014.096	8' 2"	10/3 STO	Black	N. American	.650 - .680	30A/250V	

